




# ZEEL<sup>®</sup> Frame





## Reframing Innovation and Design


Introducing ZEEL<sup>®</sup>. The future of versatile frame design.

- ZEEL<sup>®</sup> is a sleek, minimal frame designed to be stained or painted, seamlessly blending into your door.
- Never worry about extreme environments with **FiberMate Plus<sup>®</sup>**. Our strongest material withstands high temperatures and direct sunlight even when using dark, on-trend paint colors.
- Reduce service calls and warranty issues with **Resolve<sup>®</sup> Sealant**. ZEEL<sup>®</sup> is immune to squeeze out and Resolve doesn't degrade over time.
- ZEEL<sup>®</sup> eliminates the need for screws and cumbersome screw hole covers with an **innovative clip system**, allowing each frame to sit flush to the door.

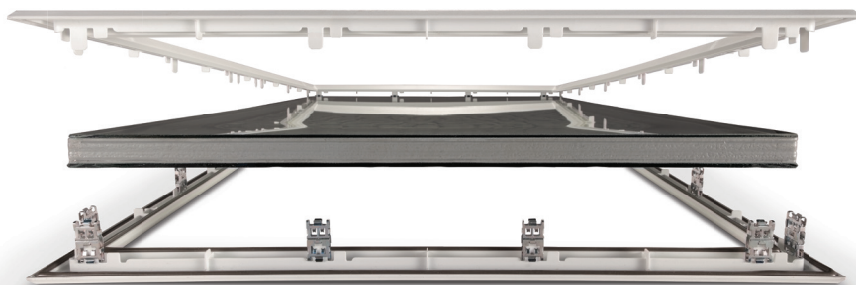

SIZES	
IG thickness	1.0"
Doorglass	20x64, 22x15, 22x17, 22x36, 22x48, 22x64, 22x80
Sidelights	7x64, 8x17, 8x36, 8x48, 8x64, 8x80
Blinds	20x64, 22x36, 22x48, 22x64, 22x80, 8x36, 8x64, 8x80
MATERIALS	
Frame	FiberMate Plus™ PC/ABS (White)
Clip	Zinc-Plated Steel
Sealant	Resolve® Sealant - Foam in place gasket
OPERATION	
Alignment Arrows	Indicate shipping position and final assembly position
Clip Connection	Long tab inserts into clip for final assembly
Frame Removal	Pry frame away from glass to replace
MAINTENANCE	
Frame	FiberMate Plus™ must be painted or stained. Will discolor over time if not finished.
Sealant	Avoid paint over spray onto sealant. Avoid harsh chemicals.
GENERAL INFORMATION	
Fits Doors	1.65" to 1.8" (Nominal 1.68")
Profile	Flat. Stands 0.25" from door
Frame Width	1.5"
Design Pressure	+/- 60.0 PSF
Frame Texture	Fir
Door Cutout	1" larger than doorglass size
WARRANTY	
Refer to ODL warranty for coverage and exclusions at ODL.com	

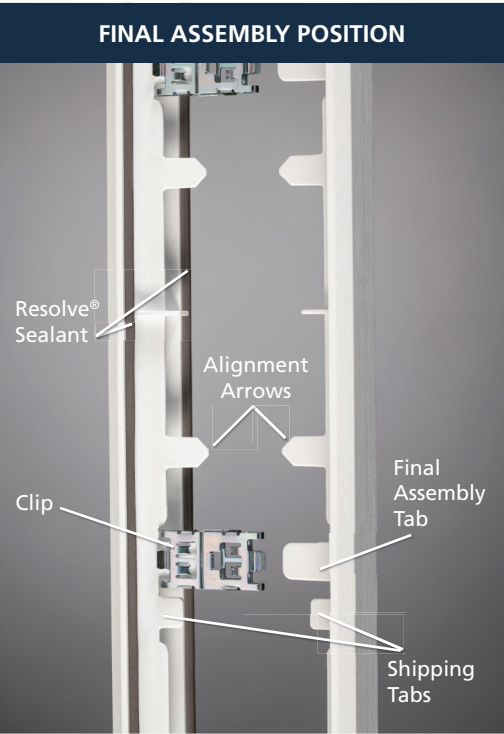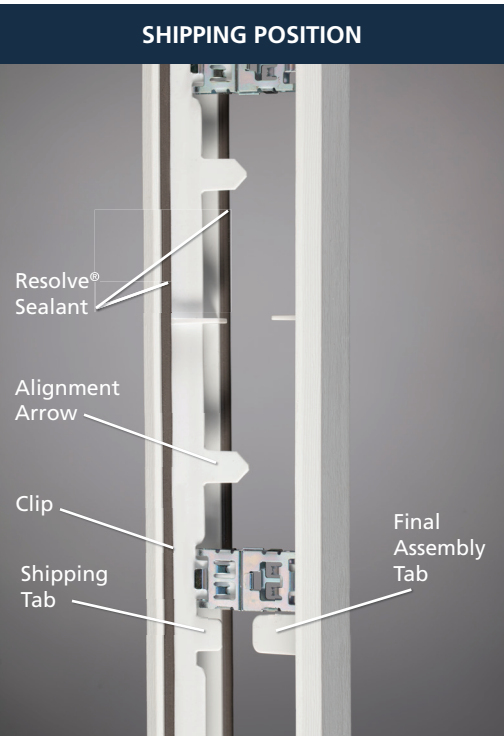



**Building Value  
Into Building Products®**

215 East Roosevelt Ave. | Zeeland, MI 49464 USA  
800.253.3900 | [odl.com](http://odl.com)




Diagram illustrating the door assembly components: INNER FRAME, IG (Insulated Glass), DOOR, and OUTER FRAME.

